

RAITECH. TERMOXIDE® WT-1100

Page 1/1

Data Sheet.



Textile protection for high temperatures up to 1,100°C

TERMOXIDE® WT-1100 are continuous chemically treated fiber glass, which withstand temperatures of 1,050°C (1,100°C peaks). TERMOXIDE® textiles have excellent performance in the harshest environments.

TERMOXIDE® WT-1100 fibers are classified as non-breathable due to their diameter. Their construction allows them to work with the material, without presenting much irritation to the skin.

It is the most common use is to manufacture welding blankets that protect expensive equipment, cables, and personnel from:


- Incandescent sparks.
- Molten metal splashes (slag).
- Extreme radiant heat during plasma or oxyfuel cutting processes.

It is also used as the outer or inner layer in insulation systems:

- **Removable Thermal Jackets:** Ideal for valves, flanges, and turbines that require frequent maintenance.
- **Steam pipe wrapping:** Helps reduce heat loss and protects operators from accidental burns.
- **Hydraulic Hose Protection:** Prevents external heat or hot slag from degrading the rubber in hoses in foundries or engine rooms.

TECHNICAL DATA:

Properties:	TERMOXIDE® WT-1100	Tape
Composition:	RAIGLASS® Si Fiber (Fiber with high aluminosilicate content)	
Temperature, Max:	2,102 °F (peak)	
Temperature, Continuous:	1,832 °F	
Shrinking @ 1796°F, 3hr:	13 %	
Tensile strength, μ :	6	
Availability:	TERMOXIDE® WT-1100	Tape
Shape:	Flat Tape	
Thickness / Width / Length:	1/16" / 2" / 98 ft	
	1/8" / 2" / 98 ft	
Tolerances:	±10 %	
Notes:	** Above 200°C, the product may smoke, due to the degradation of organic components, without altering its functioning.	

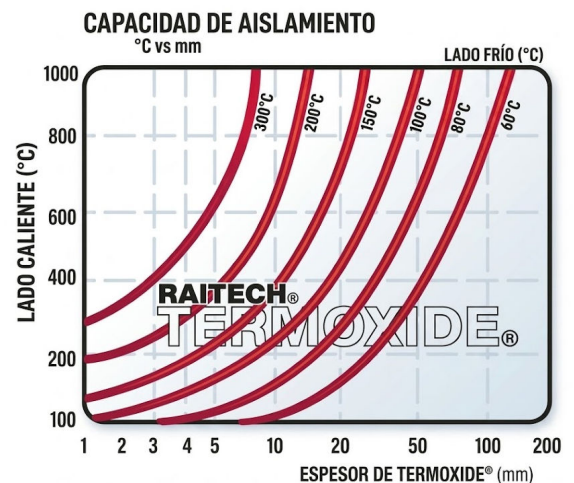

RAITECH®
Lo hicimos fácil pensando en ti.

www.raitech.mx

All technical information and recommendations given in this document are based on our experiences, however, we do not accept any liability. The data and values presented must be reviewed by the user, assuming that success in sealing can only occur by evaluating all parameters and variables directly on the job site. The parameters in this document are approximate and may have mutual influence if they occur simultaneously, please contact us in critical applications or where there is doubt.