

High performance boiler gaskets, for man hole and hand hole applications.

HEXA:GRAF® BLR gaskets are manufactured from multi-layered expanded graphite reinforced with multiple 316L metal inserts, giving the gasket greater resistance to crushing and high working pressures. The pre-densified graphite layers help maintain a uniform seal and offer greater recovery at high temperatures than traditional spiral-wound gaskets.

The controlled density on the faces of HEXA:GRAF® BLR gaskets allows them to conform to rough and irregular surfaces, enabling longer maintenance intervals.

Manufactured from our proven HEXA:GRAF® expanded graphite, HEXA:GRAF® BLR gaskets can withstand pressures up to 200 bar and high temperatures up to 550°C in steam, while also tolerating a wide range of chemicals within the pH range of 0-14 (except strong oxidizers).

- **Does not age.** HEXA:GRAF® BLR gaskets have a long shelf life, helping to reduce costs associated with expired materials.
- **Excellent sealing.** HEXA:GRAF® BLR gaskets are highly adaptable to sealing surfaces thanks to their construction and design, regardless of imperfections.
- **Easy Installation** Due to the material's construction and strength, there is no risk of overtightening the gasket and cutting it in half.

Common applications.

- Boilers.
- Autoclaves.
- Heat exchangers.
- Steam accumulators.
- Water heaters.

graphite, only better.





TECHNICAL DATA:

Properties:	HEXA:GRAF® BLR Gasket
Sealing surfaces:	man-hole / hand-hole
Required Flange Roughness, Ra:	1/16" = 3.2-6.3 μ 1/8" = 3.2-12.5 μ
Composition:	98.5% Expanded Graphite + Multi-Layer Construction
Temperature, Max:	1202.0 °F (peak)
Temperature, Continuous:	932.0 °F
Temperature, Min:	-320.8 °F
Maximum pressure:	3100.8 Psi

Other boiler gaskets styles:



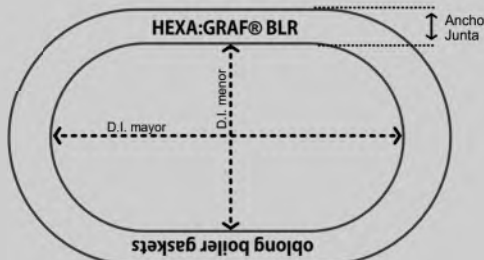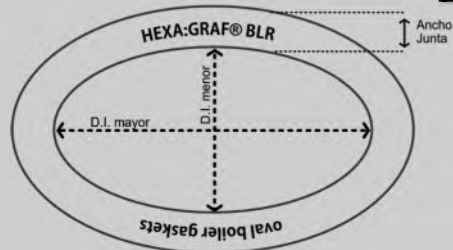

How to order:

- A) Shape: Oval or Oblong
- B) Gasket Width
- C) Internal Diameters
- D) Thicknesses: 1/4" standar, 1/8", 3/16", 1/4", 3/8", 1/2"

Questions? gaskets@raitech.mx

HEXA:GRAF® BLR - Dimensional table for boiler gaskets.

Internal Diameter Oval o Oblong	Internal Diameter Oval o Oblong	Internal Diameter Oval o Oblong	Internal Diameter Oval o Oblong
2.00 x 2.50 x (A)	3.50 x 4.50 x (A)	7.00 x 9.00 x (A)	11.50 x 14.50 x (A)
2.00 x 3.00 x (A)	3.50 x 5.00 x (A)	7.00 x 10.00 x (A)	11.50 x 15.50 x (A)
2.00 x 4.00 x (A)	3.50 x 5.50 x (A)	7.25 x 11.37 x (A)	11.75 x 15.25 x (A)
2.25 x 3.00 x (A)	3.75 x 4.75 x (A)	7.50 x 10.25 x (A)	11.75 x 15.50 x (A)
2.25 x 3.25 x (A)	3.75 x 5.25 x (A)	7.50 x 11.50 x (A)	11.75 x 15.75 x (A)
2.25 x 3.50 x (A)	3.75 x 5.50 x (A)	8.00 x 10.00 x (A)	12.00 x 15.00 x (A)
2.25 x 3.75 x (A)	4.00 x 4.37 x (A)	8.00 x 11.00 x (A)	12.00 x 15.50 x (A)
2.50 x 3.25 x (A)	4.00 x 5.00 x (A)	8.00 x 12.00 x (A)	12.00 x 16.00 x (A)
2.50 x 3.50 x (A)	4.00 x 5.25 x (A)	9.00 x 11.00 x (A)	12.25 x 16.12 x (A)
2.50 x 3.75 x (A)	4.00 x 5.50 x (A)	9.00 x 12.00 x (A)	12.50 x 15.50 x (A)
2.50 x 4.00 x (A)	4.00 x 5.75 x (A)	9.00 x 13.00 x (A)	12.50 x 16.25 x (A)
2.75 x 3.50 x (A)	4.00 x 6.00 x (A)	9.00 x 14.00 x (A)	12.50 x 16.50 x (A)
2.75 x 3.62 x (A)	4.25 x 5.12 x (A)	9.50 x 14.00 x (A)	14.00 x 18.00 x (A)
2.75 x 3.75 x (A)	4.50 x 5.00 x (A)	9.50 x 15.50 x (A)	14.50 x 18.00 x (A)
2.75 x 4.25 x (A)	4.50 x 5.50 x (A)	9.75 x 14.50 x (A)	16.00 x 18.00 x (A)
2.75 x 4.50 x (A)	4.50 x 6.00 x (A)	9.75 x 14.75 x (A)	18.00 x 21.00 x (A)
2.75 x 4.75 x (A)	4.50 x 6.50 x (A)	10.00 x 14.00 x (A)	18.00 x 24.00 x (A)
3.00 x 3.50 x (A)	4.50 x 10.25 x (A)	10.00 x 15.00 x (A)	
3.00 x 3.75 x (A)	4.75 x 6.62 x (A)	10.00 x 16.00 x (A)	
3.00 x 4.00 x (A)	5.00 x 6.00 x (A)	10.50 x 14.00 x (A)	
3.00 x 4.25 x (A)	5.00 x 6.75 x (A)	10.50 x 14.50 x (A)	
3.00 x 4.50 x (A)	5.00 x 7.00 x (A)	10.50 x 15.00 x (A)	
3.00 x 4.75 x (A)	5.00 x 7.50 x (A)	10.75 x 14.75 x (A)	
3.00 x 5.00 x (A)	5.75 x 7.25 x (A)	11.00 x 14.00 x (A)	
3.25 x 4.25 x (A)	6.00 x 7.50 x (A)	11.00 x 14.50 x (A)	
3.25 x 4.50 x (A)	6.00 x 8.00 x (A)	11.00 x 14.75 x (A)	
3.25 x 4.75 x (A)	6.00 x 8.50 x (A)	11.00 x 15.00 x (A)	
3.25 x 5.00 x (A)	6.00 x 9.00 x (A)	11.00 x 16.00 x (A)	
3.25 x 5.25 x (A)	6.00 x 10.00 x (A)	11.25 x 14.00 x (A)	
3.50 x 4.00 x (A)	6.25 x 8.25 x (A)	11.25 x 15.25 x (A)	
3.50 x 4.25 x (A)	6.50 x 8.50 x (A)	11.50 x 14.00 x (A)	

(A) Available widths

1/2", 5/8", 3/4"
1", 1-1/4", 1-1/2"

Other shapes available

- Round.
- Square.
- Rectangular.
- Pear shape.

Other boiler gaskets styles:



www.hexagraf.mx

All technical information and recommendations given in this document are based on our experiences, however, we do not accept any liability. The data and values presented must be reviewed by the user, assuming that success in sealing can only occur by evaluating all parameters and variables directly on the job site. The parameters in this document are approximate and may have mutual influence if they occur simultaneously, please contact us in critical applications or where there is doubt.